


## How To Use The Power Station

**a**

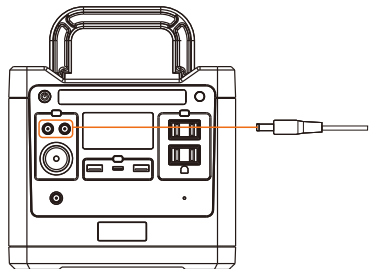


### Using with DC 12V Devices

Long press the "⏻" button for 2S to switch on power station. Connect the DC appliance to the power station's 5.5mm 12V DC port, press "DC Power Button" to switch on DC output, press the "DC Power Button" button to switch off.

Note: The power station will automatically turn off after 60 seconds if it does not detect a connected device.


**b**

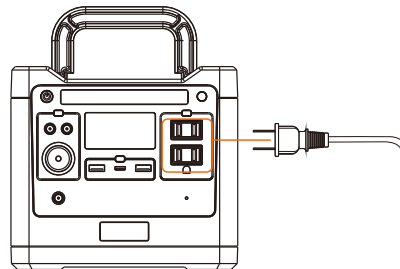

### Using with AC Devices

Long press the "⏻" button for 2S to switch on power station. Connect the AC appliance to one of the power station's AC outlet, press "AC Power Button" to switch on AC output, press the "AC Power Button" button to switch off.

**c**

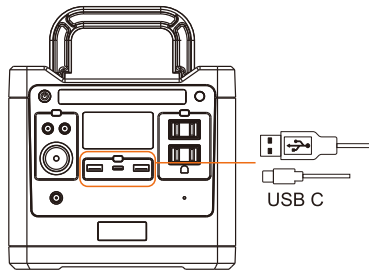


### Using with USB Devices

Long press the "⏻" button for 2S to switch on power station. Connect the USB cable to one of the power station's USB sockets. Connect the other end to your USB device. Press "USB Power Button" to switch on USB output, press the "USB Power Button" button to switch off.

USB C

**d**

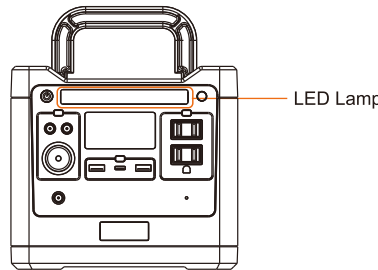

LED Lamp

### Using the LED Flashlight

LED power on: Press the LED button in turn, the order of LED light will be: Micro bright-half bright-fullbright.

LED power off: Press and hold the LED button, the LED lights will be turned off.

SOS LED power on: Double press the LED button and the SOS light will be turned on.


SOS LED power off: Press the LED button and the SOS light will be turned off.

## Charging The Power Station

**a**

### Use AC Charge to Charge the Product


1. Connect the product and power outlet with the AC adaptor included in the package.
2. Please unplug the charge when charging completed. (It takes about 5~6 hours to fully charge the product with the included power adaptor)
3. Please use the included adaptor, non-standard adapters may cause defects to the product.

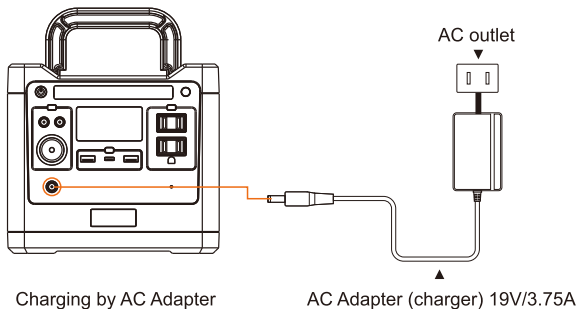

**b**

### Use Solar Panel to Charge the Product


1. Choose a suitable solar panel (Voltage 12V~24V / Max.(100W) )
2. Put the solar panel under direct sunshine, face the sun straightly.
3. Take a MC4 cable or DC5525 cable (not included), connect the solar panel and the product.
4. When the product is fully charged, it will stop charging automatically. Please remove the charging cable, and turn off the product.

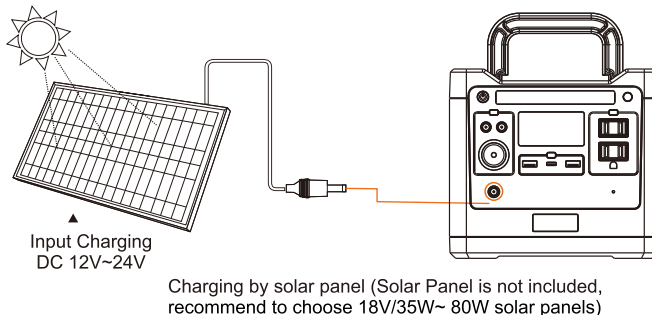

**c**

### Use Car Cigarette Lighter to Charge the Product

1. Connect the product and the car cigarette lighter socket with the cigarette lightercable included in package.
  2. Charge the product after starting the car.
- Note: The car needs to be started before it can charge the product, otherwise it may run out of battery power.

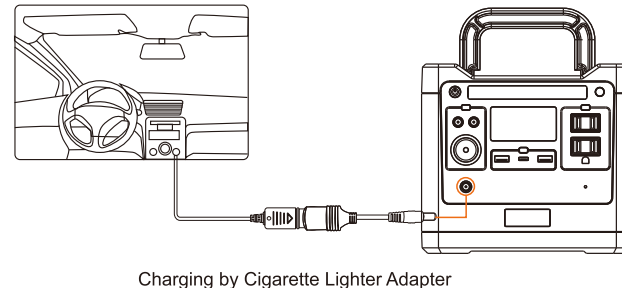

**Warning: The AC output ports can not be used when charging the power station**

For any support or comments concerning this products,  
please send an email to: [service@sungale.com](mailto:service@sungale.com) or toll free number in the USA: 800-473-5156